



(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**12.02.2003 Bulletin 2003/07**

(51) Int Cl.7: **E04C 2/42, F16S 3/08**

(21) Application number: **97119263.8**

(22) Date of filing: **04.11.1997**

(54) **A connection assembly**

Verbindungszusammenbau

Assemblage de jonction

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**

(43) Date of publication of application:  
**19.05.1999 Bulletin 1999/20**

(73) Proprietor: **ROYAL PACKAGING INDUSTRY VAN  
LEER N.V.**  
**1180 AA Amstelveen (NL)**

(72) Inventors:  
• **Van Glezen, Maurice Gerardus Maria**  
**2082 GV Santpoort Zuid (NL)**

• **Martens, Paul**  
**2215 RJ Voorhout (NL)**

(74) Representative: **Popp, Eugen, Dr. et al**  
**MEISSNER, BOLTE & PARTNER**  
**Postfach 86 06 24**  
**81633 München (DE)**

(56) References cited:  
**WO-A-91/02922** **GB-A- 2 106 948**  
**GB-A- 2 133 430** **GB-A- 2 303 653**

**BEST AVAILABLE COPY**

**EP 0 916 777 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] The present invention relates to a connection assembly for connecting two elongate elements at an intersection. Such connections are useful in various commercial applications where one element such as a tube or a rod is to be connected at an angle with another tube. Commercial applications would include the production of grids, fences, cages. Applications are also foreseen in the furniture and aircraft industries as well as in the packaging and transportation of freight.

[0002] The German Patent DE-C-33 44 351 discloses a grid arrangement wherein plate-like carrier rods are provided with oval holes therethrough. Cross-connector tubes are passed through the holes in perpendicular arrangement. After having passed through the holes, the tubes are mechanically deformed on either side of the hole to produce a connection at the intersection.

[0003] GB 2 303 653 A shows a connecting assembly and a grid construction according to the preambles of claims 1 and 17.

[0004] In many applications, it is desirable to have a lightweight construction but one of optimum mechanical strength. In such cases, it would be desirable to have a connection assembly at the point of intersection which can sustain high loads and which does not deteriorate under fatigue. Moreover, the volume taken up by the connection should be kept to a minimum to satisfy space requirements. The connection assembly, particularly when used to form a grid, should be simple and inexpensive to manufacture, but at the same time be reliable in terms of quality of the connection. Moreover, the connection assembly should be suitable for series production.

[0005] According to the present invention, a connection assembly is provided as set forth in claim 1, which satisfies the above criteria. The connection assembly comprises first and second elongate elements connected to one another at an intersection. The elements preferably are connected at right angles, although other angles are possible. The first elongate element has a receiving opening formed therein through which the second elongate element passes so as to penetrate through the first element. The first and second elements are then connected to one another at one or more positions within the region of their intersection. If the two elements are made of metal, the connection at the one or more positions may be performed by resistance welding. Alternatively, when the elements are made of plastic material, the connections can be made ultrasonic welding or induction welding. The connections can also be made by melt bonding or with an adhesive. As another alternative, the two elements may be appropriately deformed within the region of intersection so as to produce a form fit connection.

[0006] The inner diameter of the receiving hole of the first tube is preferably dimensioned with respect to the outer diameter of the second tube such that it passes

therethrough by overcoming a slight frictional force. The second tube therefore has a non-positive (frictional) connection with the first tube when mounted. This arrangement provides for stability of the connection against bending forces which will arise at the intersection. Although this arrangement is preferred a frictional fit is not necessary for the present invention.

[0007] In another embodiment of the invention, the central axes of the two elements intersect one another and form a plane. The outer surfaces of the smaller diameter second element defines two tangential planes, which are both parallel to the plane defined by the centre axes of the two elements. The elements are connected to one another at two positions at these tangential planes, where the outer surface of the second element lies opposed to an inner surface of the first element.

[0008] The first element comprises a tubular structure and is provided with one or more ridges formed along its interior. The crests of these inner ridges will contact or lie close to the outer surface of the second element when penetrated through the receiving opening. The locations where the one or more ridges either contact or lie close to the outer surface provides the one or more contact positions.

[0009] The first and second elements used in constructing the present connection assembly can be of various shapes. For example, the first and second elongate elements can be provided in tubular form with a cross-section being substantially circular, oval, square, triangular or rectangular. In a further embodiment, the first element can be provided as an open profile, such as a U-shaped or a C-shaped profile with the receiving opening provided in the side legs of the profile. It is also possible that the second elongate element be provided in the form of a plate which passes through a corresponding slot in the first element as the receiving opening.

[0010] The connection assembly of the present invention provides good mechanical strength and reliability of the connection, while at the same time allowing a simple and inexpensive manufacturing process. In the case that the second element penetrates the first element in a frictional fit, additional stability against bending moments arising within the plane of the two elements is provided. The one or more positions at which the elements are then connected enhances the strength against deformation out of the plane of the two elements.

[0011] Further objects and advantages of the invention will become apparent in the following description of embodiments in conjunction with the drawings. Fig. 1 to Fig. 3 do not show an embodiment of the invention.

Fig. 1 shows a perspective view of an embodiment of the intersection of two tubular elements.

Fig. 2 shows an embodiment in which the cross-section of the first tubular element is rectangular.

- Fig. 3 shows another embodiment in which ridges are formed on the exterior of the second element which penetrates through the first element.
- Fig. 4 shows an embodiment of the connection assembly in which ridges are formed on the interior of the first element.
- Fig. 5 shows a cross-section of the embodiment of Fig. 4 taken along the y-z plane.
- Fig. 6 shows an embodiment in which three inner ridges are formed within the first element such that the second element can be penetrated at various angles.
- Fig. 7 shows a further embodiment in which the second element penetrates and contacts four ridges on the interior of the first element.
- Fig. 8 shows an embodiment in which the first element comprises a U-profile with inner ridges.
- Fig. 9 shows an embodiment in which the second element comprises a plate inserted in a slot in the first element.
- Fig. 10 shows a grid construction comprising intersections formed of the connection assembly of the present invention.

[0012] Referring to Fig. 1, first and second elongate elements 1, 2 are placed to intersect one another by penetration of the second element 2 through an opening 3 in the first element 1. In many applications, the receiving opening 3 will be formed such that a right-angle intersection results, although this orientation is not necessary. The receiving opening 3 can be formed such that the centre axis x of the first element intersects with the centre axis y of the second element 2. Again, this arrangement is preferred, however, the centre axes x, y of the two elements may be off-set if desired for certain applications.

[0013] The first and second elements 1, 2 shown in the embodiment of Fig. 1 are tubular members having a circular cross-section. Naturally, the diameter d2 of the second tube is smaller than the diameter d1 of the first tube. Preferably the outer diameter d2 of the second element is 20% to 30% smaller than the outer diameter d1 of the first element 1. As an example, the diameter of the first tube 1 could be 22 mm with the diameter of the second tube 2 being 16 mm.

[0014] Fig. 2 shows an embodiment in which the first element 1 comprises a tubular structure of substantially rectangular cross-section. Other tubular constructions are possible and are not limited to the embodiments of Figs. 1 and 2. For example, the first and/or second ele-

ments could be tubular structures having a circular, oval, square, triangular or rectangular cross-section.

[0015] The first and second elements 1, 2 are connected to one another at one or more positions 4 in the region of their intersection. In the embodiments of the Figs. 1 and 2, the first and second tubes are connected at two positions at either side of the intersection indicated by the reference numeral 4. For example, when the elements 1, 2 are metal tubes as shown in Figs. 1 and 2, the second tube 2 is inserted and properly positioned with respect to the first tube. Welding is then performed at the positions 4 under sufficient pressure to urge the two sides of the first tube 1 into contact with the outer wall of the second tube 2 under formation of the weld. In this embodiment, the second tube 2 requires no further processing once purchased from the manufacturer. The first tube 1 need only be provided with the receiving hole at the proper orientation and spacing.

[0016] The inner dimension of the receiving opening 3 formed in the first element 1 is preferably sized with respect to the outer dimension d2 of the second element 2 such that there is no play between the receiving opening 3 and the second element 2. In this preferred embodiment, the second element 2 is then inserted through the opening 3 under the application of force to overcome friction between the outer surface of the second element 2 and the inner defining surfaces of the receiving opening 3. In this manner a non-positive frictional fit is established between the first and second elements 1, 2. This construction adds to the mechanical strength of the connection assembly, particularly against bending moments which may arise under load in the plane of the two elements.

[0017] In another embodiment as shown in Fig. 3, the second element 2 is provided with two projecting ridges 8 on its outer surface. The receiving opening 3 is adapted to receive the second element 2 with the ridges and with or without play. Once inserted to penetrate through the first element 1, the two elements 1, 2 are connected to one another at the positions P<sub>1</sub> and P<sub>2</sub>. Although not shown in Fig. 3, the first element 1 could also be provided with ridges on its interior surface. Such ridges could be disposed to engage with the projecting ridges (8) on the outer surface of the second element 2.

[0018] In an embodiment of the invention as shown in Figs. 4 and 5, the first elongate element 1 is tubular and comprises two inner ridges 5 arranged to contact the outer surface of the second element 2 at two positions P<sub>1</sub>, P<sub>2</sub>. The tubular member 1 of larger diameter is pre-processed to form the two ridges 5 projecting into the interior of the tube. The ridges 5 can be formed when making the tube by externally applying pressure to form a longitudinal crease or indentation 6 as shown in Fig. 4. Alternatively, the indentation can be formed only in the regions of the intersection of the two elements. An internal ridge could also be formed in the interior during the production process of the tube, whereby the outer diameter of the tube would remain circular.

**[0019]** As shown in Fig. 5, the second tubular elements 2 in this embodiment define tangential planes 10, 20 which lie parallel to the plane defined by the centre axes  $x$ ,  $y$  of the first and second tubes 1, 2 respectively. The inner ridges 5 of the first tube 1 are dimensioned so as to contact the outer surface of the second tube 2 at the two tangential planes 10, 20 when assembled. The connection of the two tubes is then performed at the two positions  $P_1$  and  $P_2$  where the crest of the inner ridges 5 contact the outer surface of the second tube 2. As mentioned above, the connection at these positions will normally be performed by resistance welding for metallic tubes or alternatively by fusion bonding or adhesion for plastic tubes.

**[0020]** As can also be seen in Fig. 5, the maximum width of the connection assembly corresponds to the distance  $W$  which is the dimension of the first tube 1 in the  $z$  direction. The overall width  $W$  is only slightly larger than the distance between the tangential planes 10, 20 of the smaller diameter of the second tube 2. This allows considerable savings in space for applications to grid constructions where space on either side of the grid is often of importance.

**[0021]** A further embodiment of the present invention is shown in Fig. 6 wherein the first element is provided as a tubular member having three ridges 5 formed therein. In this embodiment, the second element 2 penetrates the receiving opening or hole 3 such that it contacts only one of the inner ridges 5. The contact position is indicated generally at reference numeral 4. Thus in this embodiment, the two elements 1, 2 are connected to one another at only one position. Depending on the angular spacing of the ridges about the centre axis  $x$ , the second elements 2 can be oriented at various angles about the axis  $x$  of the first tube 1. As can be seen from Fig. 6, the centre axis  $y$  of the second tube 2 does not intersect the centre axis  $x$  of the first tube 1. Generally, according to the present invention the respective axes  $x$ ,  $y$  of the tubes need not intersect one another. This will depend on the particular application and on the relative diameters of the first and second tubular members 1, 2 as well as their desired orientation with respect to one another.

**[0022]** It will also be appreciated from Fig. 6 that the angular position of the ribs 5 could be positioned such that the outer surface of the tube 2 contacts two ridges on one of its sides and one ridge on the other side. The skilled person will recognize from Fig. 6 that many combinations of the ridge orientation and the second tube penetration position are possible.

**[0023]** Fig. 7 shows another embodiment in which four ridges are provided to project into the interior of the first tubular element 2. In this embodiment, the receiving opening as well as the diameter of the second tubular element 2 is dimensioned such that the four positions  $a$ ,  $b$ ,  $c$ ,  $d$  exist at which the elements can be connected to one another. As above, the embodiments of Figs. 6 and 7 can comprise elements which are tubular in structure and which have circular, oval, square, triangular or rec-

tangular cross-sections. Alternatively, the second elements could be solid rods having the various cross-sections.

**[0024]** A still further embodiment of the present invention is shown in Fig. 8. In this case, the first elongate element is provided as an open profile, particularly a U-shaped profile. However, any shape of the open profile is possible as long as walls 1a, 1b, 1c are present through which the receiving opening 3 can be formed. In the present embodiment of Fig. 8, the side walls 1a, 1b of the U-shaped profile are substantially parallel to one another. This would make it somewhat easier to form the receiving holes 3a, 3b, for example by means of stamping. As shown in Fig. 8, the second element 2 can be penetrated through the two parts 3a, 3b of the legs 1a, 1b of the U-shaped profile. Alternatively, the base 1c of the U-shaped profile can be provided with a single opening (not shown) through which the second tubular member 2 passes. In this case, the element 2 is connected to two inner ridges 5, one on either of the legs 1a, 1b. The connection position is shown by the reference numeral 4 on the exterior of leg 1a.

**[0025]** When the second tubular member 2 passes the profile through the legs 1a, 1b, the outer surface of the second element 2 contacts a ridge 5 formed in the base 1c of the U-shaped profile. The contact position  $P_3$  is then the single position at which the two elements are connected with one another.

**[0026]** Another embodiment of the invention is shown in Fig. 9, where the penetrating element 2a is formed as a plate. The plate 2a passes through a slot 3a formed in the first tubular member 1. When inserted, a ridge 5a formed on the plate 2a contacts the crest of an inner ridge 5 formed in the element 1. As shown in Fig. 9, one plate element could be inserted to contact the upper ridge 5 of the tubular element 1. It is apparent that another plate element 2a could be inserted into a slot indicated as 3b in Fig. 9 with the ridge 5a being oriented downwardly. In this case, the ridge 5a of the plate will contact the lower ridge 5 within the tube 1. Other variations are possible. For example, the plate 2a could be provided with two or more ridges allowing two or more connection positions with the inner ridge 5 of the tube 1.

**[0027]** Although it is preferred to weld the two elements at their connected positions when made of metal or to bond the elements when made of plastic, it would also be possible to form the connections at the one or more positions by means of a form fit. For example, in the Figs. 4 to 9, at least one inner ridge of the first tubular member engages with the outer surface of the second element 2. It would be possible to form a recess or indentation in the outer surface of the second element 2 for receiving the crest of the ridge. The engagement of the ridge in the recess on the outer surface of the second element 2 establishes a form fit connection, which would prevent axial movement of the second element 2. Alternatively, the first tubular element could be indented inwardly to force a matching indentation of the outer sur-

face of the inner second element. The matching deformation of the first and second elements would also provide a form fit. For example as shown in Fig. 2, an indentation could be formed in the outer tube 1 at the location 4. The indentation 4 would be deep enough to form a matching deformation in the second tube 2, whereby an interconnecting fit would be established.

[0028] The connection assembly of the present invention is particularly suitable for the formation of a grid. Fig. 10 illustrates an embodiment of such a grid comprising first and second tubes 1, 2 arranged parallel to one another in spaced relationship. At their intersections, the first and second tubes are provided with a connection assembly as described above. The grid construction formed in this manner provides particularly high mechanical strength while being light in weight. Moreover, only the first tube 1 need be further processed, for example by the formation of the receiving hole or the provision of a ridge. The other cross tube 2 can be used as it is supplied from the manufacturer. The formation of the grid is therefore easy and inexpensive and readily adaptable to series production.

#### Claims

##### 1. A connection assembly comprising:

first and second elongate elements (1, 2) connected to one another at an intersection,

the first element (1) having a receiving opening (3) formed therein through which the second element (2) is passed,

the first element (1) being connected to the second element (2) at one or more positions ( $P_1$ ,  $P_2$ ) in the region of their intersection

##### characterised in that

the first elongate element (1) is tubular and comprises one or more inner ridges (5), the ridges (5) arranged to lie close to or contact the outer surface of the second element (2) to form said one or more positions ( $P_1$ ,  $P_2$ ) at which the elements (1, 2) are connected.

2. The assembly of Claim 1, wherein an inner dimension of the receiving opening (3) of the first element (1) is dimensioned with respect to an outer dimension ( $d_2$ ) of the second element (2) so as to provide a frictional fit of the two elements (1, 2).

3. The assembly of Claim 1 or 2, wherein two connection positions ( $P_1$ ,  $P_2$ ) are formed where the outer surface of the second element (2) lies opposed to the inner surface of the first element (1).

4. The assembly of Claim 3, wherein the first and second elements (1, 2) are tubular, the first and second elements being generally circular, oval, square triangular or rectangular in cross-section.

5. The assembly of Claim 3 or 4, wherein the outer surface of the second element (2) is provided with two ridges (8) which lie close to or contact the inner surface of the first element (1) to form said two connection positions ( $P_1$ ,  $P_2$ ).

6. The assembly of Claim 1, wherein the first and second elements (1, 2) are tubular and circular in cross-section, the first element (1) having two inner ridges (5) formed opposite one another with respect to its centre axis (x), the two ridges (5) contacting the outer surface of the second tubular element (2) to form two positions ( $P_1$ ,  $P_2$ ) at which the elements (1, 2) are connected.

7. The assembly of Claim 1, wherein the first element (1) comprises three inner ridges (5), the receiving opening (3) being provided such that the outer surface of the second element (2) contacts one of the inner ridges (5) at which position the elements (1, 2) are connected.

8. The assembly of Claim 1, wherein the first element (1) comprises four inner ridges (a, b, c, d), the four ridges arranged to contact the outer surface of the second element at four positions (a, b, c, d) at which the elements (1, 2) are connected.

9. The assembly of any one of the Claims 1 to 8, wherein the first and second elongate elements (1, 2) are tubular, the elements (1, 2) being generally circular, oval, square, triangular or rectangular in cross-section.

10. The assembly of Claim 1 or 2, wherein the first elongate element (1) is formed as an open profile, such as a U-shaped or C-shaped profile, the profile (1) having one or more inner ridges (5) arranged to contact the outer surface of the second element to form said one or more positions ( $P_3$ ) at which the elements (1, 2) are connected.

11. The assembly of Claim 10, wherein the second elongate element (2) is tubular with its cross-section being generally circular, oval, square, triangular or rectangular.

12. The assembly of any one of the Claims 1, 2 or 10, wherein the second elongate element (2) is a plate (2a) which passes through a slot (3a) as the receiving opening in said first elongate element (1).

13. The assembly of Claim 12, wherein the first elongate

gate element (1) comprises a tube (1) having at least one inner ridge (5), said plate (21) having another ridge (5a) adapted to contact the inner ridge (5) of the tube (1) when inserted into the receiving opening (3) to provide for the position for connection of the two elements (1, 2).

14. The assembly of any one of the Claims 1 to 13, wherein the first and second elongate elements (1, 2) are made of metal and the elements (1, 2) are connected at said one or more positions ( $P_1$ ,  $P_2$ ) by welding.

15. The assembly of any one of the Claims 1 to 13, wherein the first and second elongate elements (1, 2) are made of a plastic material and the elements (1, 2) are connected at said one or more positions ( $P_1$ ,  $P_2$ ) by ultrasonic welding, induction welding or melt bonding.

16. The assembly of any one of the Claims 1 to 4, wherein the first and second elongate elements (1, 2) are connected at said one or more positions ( $P_1$ ,  $P_2$ ,  $P_3$ ) by deforming one or both of the elements (1, 2) at one or more of said positions ( $P_1$ ,  $P_2$ ,  $P_3$ ) so as to produce a form fit between the two elements (1, 2).

17. A grid construction comprising:

a plurality of first elongate elements (1) arranged in parallel and in spaced relationship with one another,

a plurality of second elongate elements (2) arranged in parallel and in spaced relationship with one another,

the first and second elements (1, 2) intersecting one another, **characterised in that** the first and second elements (1, 2) are connected in a connection assembly as defined in any one of the Claims 1 to 16.

#### Patentansprüche

1. Verbindungsbaugruppe mit:

einem ersten und zweiten langgestreckten Bauteil (1, 2), die an einer Kreuzungsstelle miteinander verbunden sind,

wobei das erste Bauteil (1) eine darin ausgebildete Aufnahmeöffnung (3) aufweist, durch die das zweite Bauteil (2) hindurchgeführt ist, wobei das erste Bauteil (1) an einer Position oder mehreren Positionen ( $P_1$ ,  $P_2$ ) im Bereich ihrer Kreuzungsstelle mit dem zweiten Bauteil (2) verbunden ist,

dadurch gekennzeichnet, dass

das erste langgestreckte Bauteil (1) rohrförmig ist und eine oder mehrere Innenrippe/n (5) umfasst und die Rippen (5) so angeordnet sind, dass sie nahe bei der Außenoberfläche des zweiten Bauteils (2) liegen oder diese berühren, um die eine Position oder die mehreren Positionen ( $P_1$ ,  $P_2$ ) auszubilden, an der die Bauteile (1, 2) verbunden sind.

2. Baugruppe nach Anspruch 1, bei der eine Innenabmessung der Aufnahmeöffnung (3) des ersten Bauteils (1) im Hinblick auf eine Außenabmessung ( $d_2$ ) des zweiten Bauteils (2) so dimensioniert ist, dass sie einen Reibschluss der beiden Bauteile (1, 2) bereitstellt.

3. Baugruppe nach Anspruch 1 oder 2, bei der zwei Verbindungspositionen ( $P_1$ ,  $P_2$ ) ausgebildet sind, an denen die Außenoberfläche des zweiten Bauteils (2) der Innenoberfläche des ersten Bauteils (1) gegenüberliegt.

4. Baugruppe nach Anspruch 3, bei der das erste und zweite Bauteil (1, 2) rohrförmig ist, wobei das erste und zweite Bauteil im Querschnitt im allgemeinen kreisförmig, oval, quadratisch, dreieckig oder rechteckig ist.

5. Baugruppe nach Anspruch 3 oder 4, bei der die Außenoberfläche des zweiten Bauteils (2) mit zwei Rippen (8) versehen ist, die nahe bei der Innenoberfläche des ersten Bauteils (1) liegen oder diese berühren, um die beiden Verbindungspositionen ( $P_1$ ,  $P_2$ ) auszubilden.

6. Baugruppe nach Anspruch 1, bei der das erste und zweite Bauteil (1, 2) im Querschnitt rohr- und kreisförmig ist, wobei das erste Bauteil (1) zwei Innenrippen (5) aufweist, die im Hinblick auf seine Mittenachse (x) entgegengesetzt ausgebildet sind, wobei die beiden Rippen (5) die Außenoberfläche des zweiten rohrförmigen Bauteils (2) berühren, um zwei Positionen ( $P_1$ ,  $P_2$ ) auszubilden, an denen die Bauteile (1, 2) verbunden sind.

7. Baugruppe nach Anspruch 1, bei der das erste Bauteil (1) drei Innenrippen (5) umfasst, wobei die Aufnahmeöffnung (3) so vorgesehen ist, dass die Außenoberfläche des zweiten Bauteils (2) eine der Innenrippen (5) berührt, an welcher Position die Bauteile (1, 2) verbunden sind.

8. Baugruppe nach Anspruch 1, bei der das erste Bauteil (1) vier Innenrippen (a, b, c, d) umfasst, wobei die vier Innenrippen so angeordnet sind, dass sie die Außenoberfläche des zweiten Bauteils an vier

Positionen (a, b, c, d) berührt, an denen die Bauteile (1, 2) verbunden sind.

9. Baugruppe nach einem der Ansprüche 1 bis 8, bei der das erste und zweite langgestreckte Element (1, 2) rohrförmig ist, wobei die Bauteile (1, 2) im Querschnitt im wesentlichen kreisförmig, oval, quadratisch, dreieckig oder rechteckig sind.
10. Baugruppe nach Anspruch 1 oder 2, bei der das erste langgestreckte Element (1) als offenes Profil, wie ein U- oder C-förmiges Profil ausgebildet ist, wobei das Profil (1) eine oder mehrere Innenrippe/n (5) aufweist, die so angeordnet ist/sind, dass sie die Außenoberfläche des zweiten Bauteils berührt/berühren, um die eine Position oder die mehreren Positionen ( $P_3$ ) auszubilden, an denen die Bauteile (1, 2) verbunden sind.
11. Baugruppe nach Anspruch 10, bei der das zweite langgestreckte Bauteil (2) rohrförmig ist, wobei sein Querschnitt im allgemeinen kreisförmig, oval, quadratisch, dreieckig oder rechteckig ist.
12. Baugruppe nach einem der Ansprüche 1, 2 oder 10, bei der das zweite langgestreckte Bauteil (2) eine Platte (2a) ist, die durch einen Schlitz (3a) als Aufnahmeöffnung im ersten langgestreckten Bauteil (1) hindurchgeht.
13. Baugruppe nach Anspruch 12, bei der das erste langgestreckte Bauteil (1) ein Rohr (1) mit mindestens einer Innenrippe (5) umfasst, wobei die Platte (2a) eine weitere Rippe (5a) aufweist, die dazu ausgelegt ist, die Innenrippe (5) des Rohrs (1) zu berühren, wenn die Platte in die Aufnahmeöffnung (3) eingeschoben ist, um die Position zur Verbindung der beiden Bauteile (1, 2) bereitzustellen.
14. Baugruppe nach einem der Ansprüche 1 bis 13, bei der das erste und zweite langgestreckte Bauteil (1, 2) aus Metall besteht, und die Bauteile (1, 2) an der einen Position oder den mehreren Positionen ( $P_1$ ,  $P_2$ ) durch Schweißen verbunden sind.
15. Baugruppe nach einem der Ansprüche 1 bis 13, bei der das erste und zweite langgestreckte Bauteil (1, 2) aus Kunststoff besteht, und die Elemente (1, 2) an der einen Position oder den mehreren Positionen ( $P_1$ ,  $P_2$ ) durch Ultraschallschweißen, Induktionsschweißen oder Schmelzverbinden verbunden sind.
16. Baugruppe nach einem der Ansprüche 1 bis 4, bei der das erste und zweite langgestreckte Bauteil (1, 2) an der einen Position oder den mehreren Positionen ( $P_1$ ,  $P_2$ ,  $P_3$ ) durch Verformung eines Bauteils oder beider Bauteile (1, 2) an einer Position oder

mehreren der Positionen ( $P_1$ ,  $P_2$ ,  $P_3$ ) verbunden sind, um einen Formschluss zwischen den beiden Bauteilen (1, 2) herzustellen.

#### 17. Gitterkonstruktion mit:

mehreren ersten langgestreckten Bauteilen (1), die zueinander parallel und in beabstandetem Verhältnis angeordnet sind,

mehreren zweiten langgestreckten Bauteilen (2), die zueinander parallel und in beabstandetem Verhältnis angeordnet sind,

wobei die ersten und zweiten Bauteile (1, 2) einander kreuzen, **dadurch gekennzeichnet, dass** die ersten und zweiten Bauteile (1, 2) in einer wie in einem der Ansprüche 1 bis 16 definierten Verbindungsbaugruppe verbunden sind.

#### Revendications

##### 1. Ensemble de connexion comprenant :

des premiers et des deuxièmes éléments allongés (1, 2), connectés les uns aux autres à une intersection,

le premier élément (1) comportant une ouverture de réception (3) formée en lui par laquelle le deuxième élément (2) est passé,

le premier élément (1) étant connecté au deuxième élément (2) en une position ou en plusieurs positions ( $P_1$ ,  $P_2$ ), dans la région de leur intersection,

##### caractérisé en ce que

le premier élément allongé (1) est tubulaire et comprend une ou plusieurs nervures intérieures (5), les nervures (5) étant arrangées pour être proches ou en contact avec la surface extérieure du deuxième élément (2) pour former ladite position ou lesdites positions ( $P_1$ ,  $P_2$ ) en lesquelles les éléments (1, 2) sont connectés.

2. L'ensemble selon la revendication 1, dans lequel une dimension intérieure de l'ouverture de réception (3) du premier élément (1) est définie en fonction d'une dimension extérieure ( $d_2$ ) du deuxième élément (2) de façon à assurer un montage par frottement des deux éléments (1, 2).

3. L'ensemble selon la revendication 1 ou 2, dans lequel deux positions de connexion ( $P_1$ ,  $P_2$ ) sont formées à l'emplacement où la surface extérieure du

deuxième élément (2) est opposée à la surface intérieure du premier élément (1).

4. L'ensemble selon la revendication 3, dans lequel les premiers et les deuxièmes éléments (1, 2) sont tubulaires, les premiers et les deuxièmes éléments étant généralement circulaires, ovales, carrés, triangulaires ou rectangulaires dans leur section transversale.
5. L'ensemble selon la revendication 3 ou 4, dans lequel la surface extérieure du deuxième élément (2) comprend deux nervures (8) proches ou en contact avec la surface intérieure du premier élément (1) pour former lesdites deux positions de connexion ( $P_1$ ,  $P_2$ ).
6. L'ensemble selon la revendication 1, dans lequel les premiers et les deuxièmes éléments (1, 2) sont tubulaires et circulaires dans leur section transversale, le premier élément (1) comprenant deux nervures intérieures (5) formées de manière opposée l'une à l'autre selon son axe central (x), les deux nervures (5) étant en contact avec la surface extérieure du deuxième élément tubulaire (2) pour former deux positions ( $P_1$ ,  $P_2$ ) en lesquelles les éléments (1, 2) sont connectés.
7. L'ensemble selon la revendication 1, dans lequel le premier élément (1) comprend trois rainures intérieures (5), l'ouverture de réception (3) étant fournie de façon à ce que la surface extérieure du deuxième élément (2) soit en contact avec les rainures intérieures (5) à la position en laquelle les éléments (1, 2) sont connectés.
8. L'ensemble selon la revendication 1, dans lequel le premier élément (1) comprend quatre rainures intérieures (a, b, c, d), les quatre rainures étant disposées de façon à être en contact avec la surface extérieure du deuxième élément (2) en quatre positions (a, b, c, d) en lesquelles les éléments (1, 2) sont connectés.
9. L'ensemble selon l'une quelconque des revendications 1 à 8, dans lequel les premiers et les deuxièmes éléments allongés (1, 2) sont tubulaires, les éléments (1, 2) étant généralement circulaires, ovales, carrés, triangulaires ou rectangulaires dans leur section transversale.
10. L'ensemble selon la revendication 1 ou 2, dans lequel le premier élément allongé (1) est formé en tant que profil ouvert, tel qu'un profil en forme de U ou de C, le profil (1) ayant une ou plusieurs rainures intérieures (5) disposées de façon à être en contact avec la surface extérieure du deuxième élément pour former ladite position ou lesdites positions ( $P_3$ )

en lesquelles les éléments (1, 2) sont connectés.

11. L'ensemble selon la revendication 10, dans lequel le deuxième élément allongé (2) est tubulaire, sa section transversale étant généralement circulaire, ovale, carrée, triangulaire ou rectangulaire.
12. L'ensemble selon l'une quelconque des revendications 1, 2 ou 10, dans lequel le deuxième élément allongé (2) est une plaque (2a) qui passe à travers une fente (3a) en tant qu'ouverture de réception dans ledit premier élément allongé (1).
13. L'ensemble selon la revendication 12, dans lequel le premier élément allongé (1) comprend un tube (1) ayant au moins une nervure intérieure (5), ladite plaque (21) ayant une autre nervure (5a) adaptée à entrer en contact avec la nervure intérieure (5) du tube (1) lorsqu'elle est insérée dans l'ouverture de réception (3) pour assurer le positionnement pour la connexion des deux éléments (1, 2).
14. L'ensemble selon l'une quelconque des revendications 1 à 13, dans lequel les premiers et les deuxièmes éléments allongés (1, 2) sont fabriqués en métal et les éléments (1, 2) sont connectés par soudage en ladite position ou en lesdites positions ( $P_1$ ,  $P_2$ ).
15. L'ensemble selon l'une quelconque des revendications 1 à 13, dans lequel les premiers et les deuxièmes éléments allongés (1, 2) sont fabriqués en un matériau plastique et les éléments (1, 2) sont connectés en ladite position ou en lesdites positions ( $P_1$ ,  $P_2$ ) par soudage par ultrasons, soudage par induction ou par liaison par fusion.
16. L'ensemble selon l'une quelconque des revendications 1 à 4, dans lequel les premiers et les deuxièmes éléments allongés (1, 2) sont connectés en ladite position ou en lesdites positions ( $P_1$ ,  $P_2$ ,  $P_3$ ) par déformation de l'un ou des deux éléments (1, 2) en l'une ou en plusieurs desdites positions ( $P_1$ ,  $P_2$ ,  $P_3$ ) de façon à ce que les deux éléments (1, 2) s'encastrent.
17. Construction en quadrillage comprenant :
  - une pluralité de premiers éléments allongés (1) disposés en parallèle et en relation espacée les uns par rapport aux autres,
  - une pluralité de deuxièmes éléments allongés (2) disposés en parallèle et en relation espacée les uns par rapport aux autres,
  - les premiers et les deuxièmes éléments (1, 2) se croisant les uns les autres,

caractérisée en ce que  
les premiers et les deuxièmes éléments (1, 2) sont  
connectés en un ensemble de connexion tel que dé-  
fini dans l'une quelconque des revendications 1 à  
16.

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

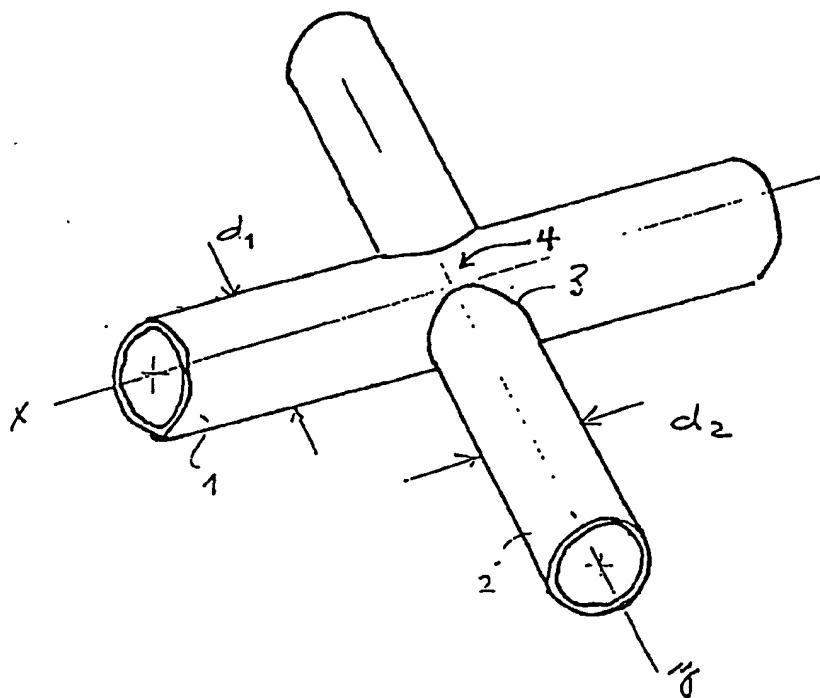


Fig. 2

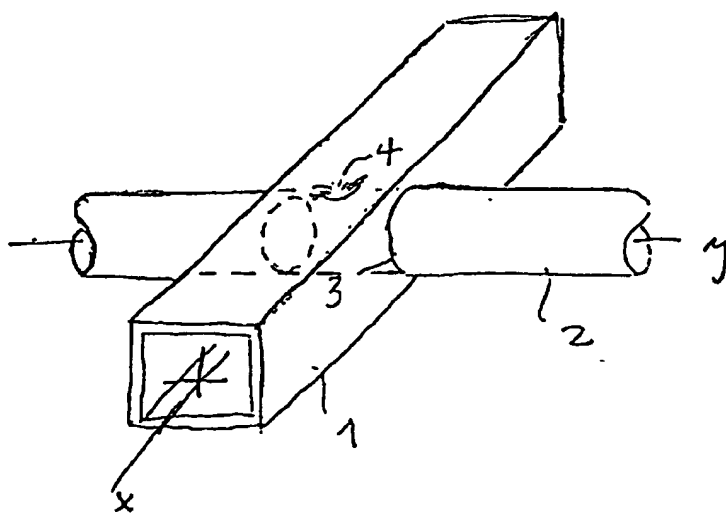


Fig. 3

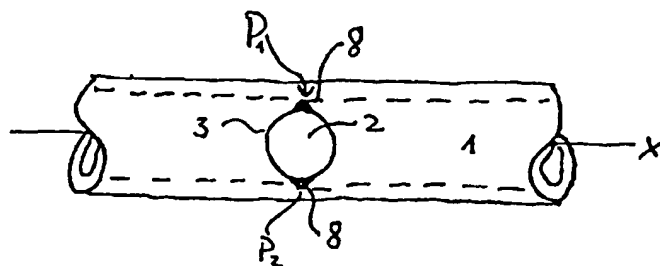


Fig. 4

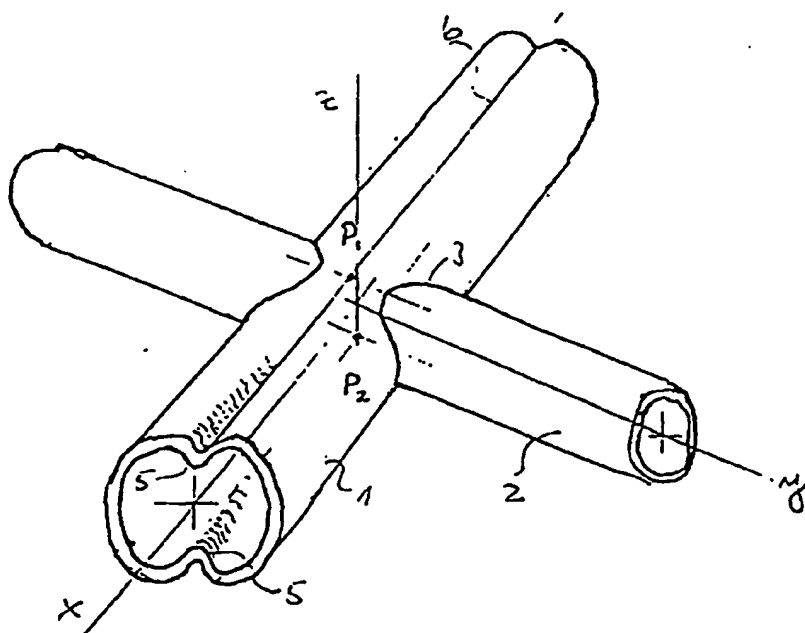
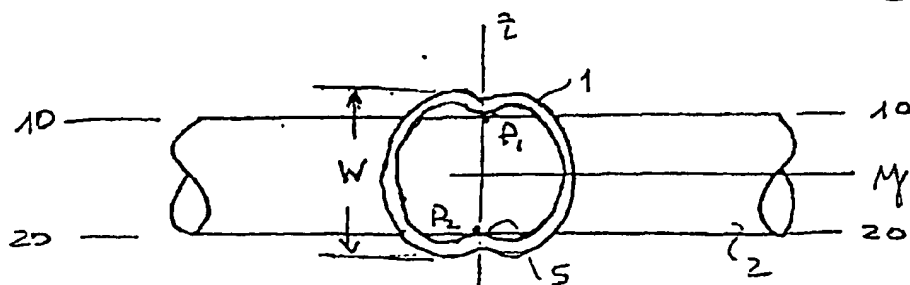


Fig. 5



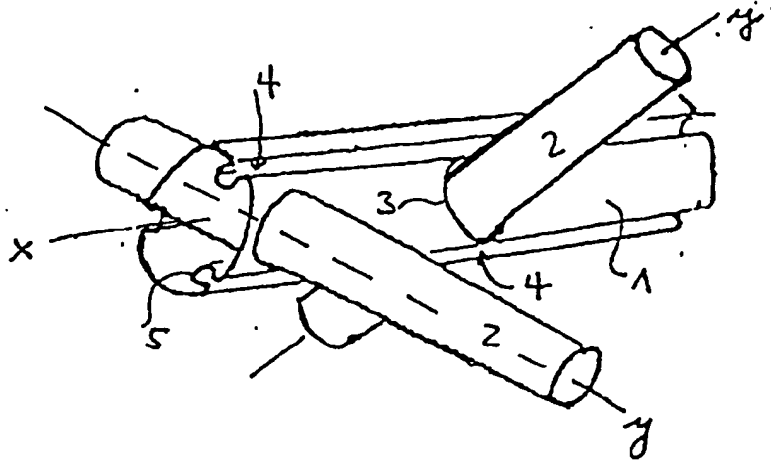
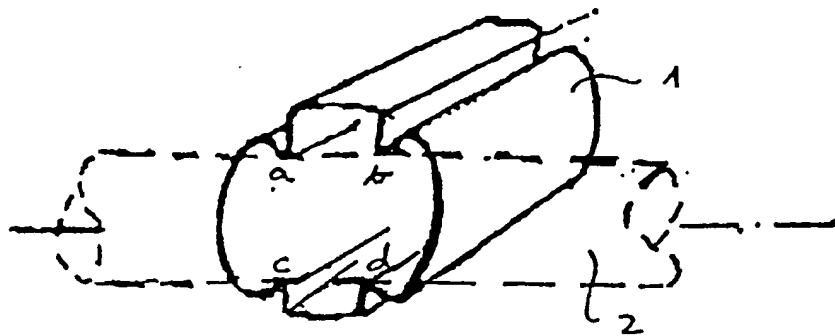


Fig. 6

Fig. 7



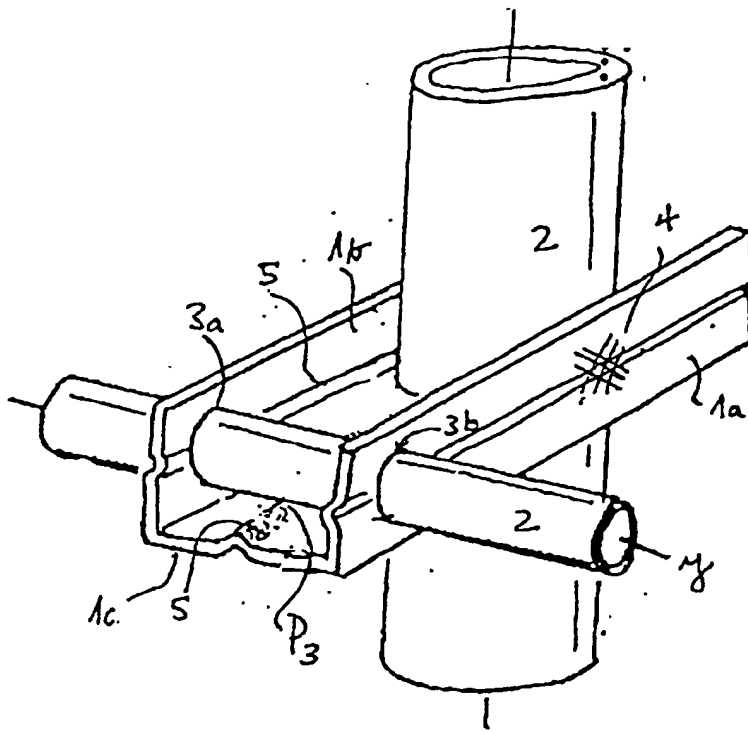


Fig. 8


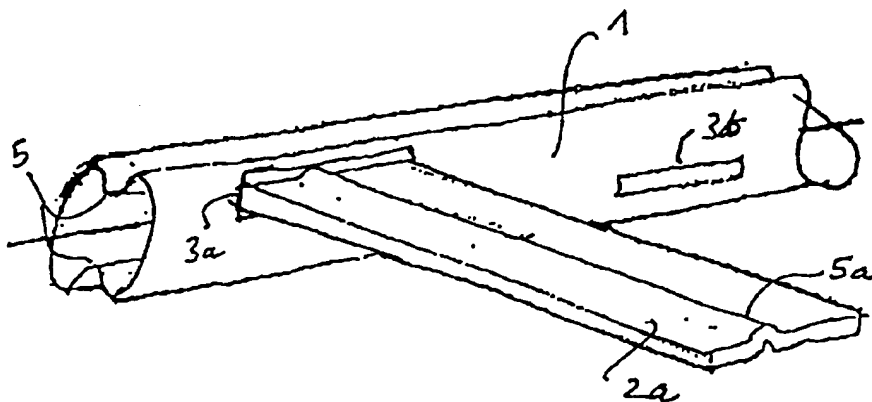


Fig. 9

Fig. 10

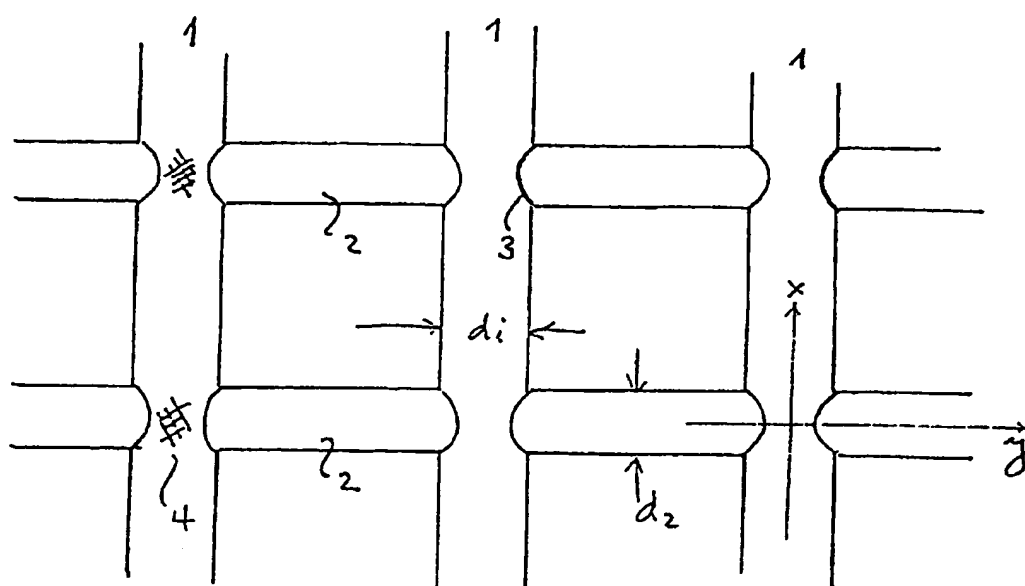

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**